

NavAssure™ Receivers


NavAssure™ 100

Micro-SAASM: Ultra small, gun hardened

- Dual Frequency L1/L2 (C/A and P(Y))
- 12 Channels
- Up to 4 antenna inputs (passive)
- 40-pin connector
- COM1 (CMOS), DS-101, 1/10 PPS
- Gun hardened to 20,000 G

Size, Weight and Power

- Size: 40mm (1.57 in) diameter
- Weight: <10 grams
- Low Power: 1 W acquisition, <1 W tracking

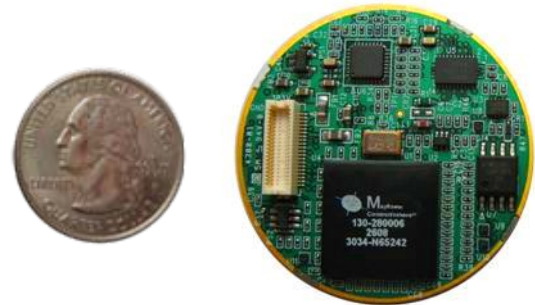


NavAssure™ 200

*Modified Type II SSI GB-GRAM**

- Dual Frequency simultaneous L1 and L2 (C/A and P(Y))
- 12 Channels
- 2 antenna inputs (active or passive)
- Modified micro 80-pin connector
- COM1 (CMOS or RS-232), COM 2 (CMOS), DS-101/102, 1 PPS

Size, Weight and Power

- Size: 1.76" x 2.45"
- Weight: <20 grams
- Low Power: 1 W acquisition, <1 W tracking

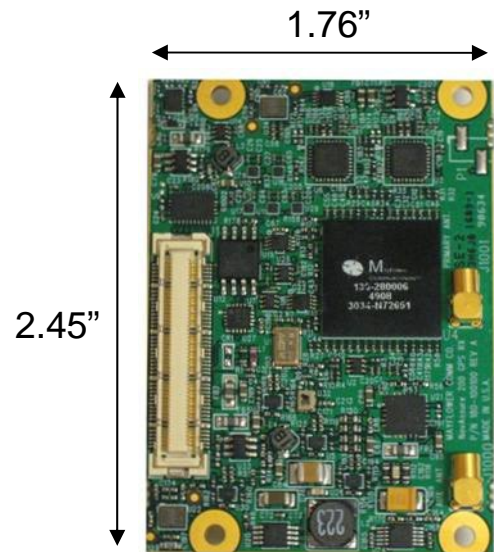

NavAssure™ is the world's **smallest, lightest and lowest power** SAASM receiver**. NavAssure™ is customizable into **any form factor** required by your application with minimal turn around time.

* Tailored subset of GB-GRAM functionality and performance
**Pending security approval from the GPS Wing