


NavAssure® 200 SAASM P(Y) Code GPS Receiver in Type II SSI Form Factor

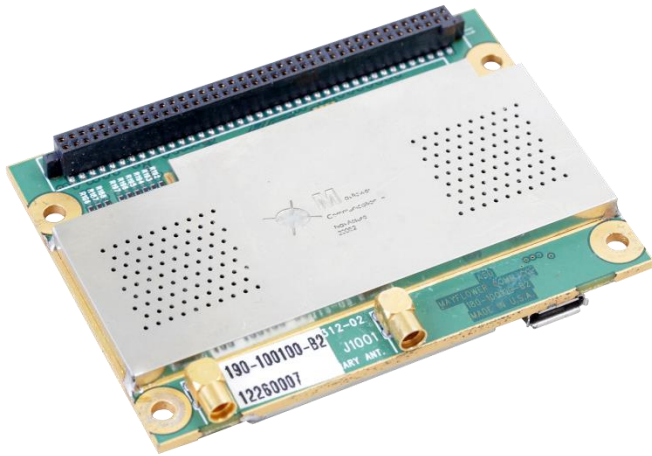

Capabilities and Features

The *NavAssure® 200* receiver is a SAASM receiver* in a standard Type II form factor. Designed from the ground-up to service the most SWAP constrained applications, *NavAssure®* allows deployment of SAASM technology in platforms never thought possible. From embedded radios to artillery applications, to micro-UAVs and Blue Force Tracking applications, Mayflower's micro SAASM receiver is redefining the military GPS receiver landscape. *NavAssure® 200* is packaged in a Type II SSI GB-GRAM form factor.

High level Features**

- Two antenna inputs: primary and auxiliary
- 12 tracking channels - all in view design
- Supports Simultaneous L1 and L2 (C/A and P(Y))
- Next Generation Security Architecture

SWAP Metrics

- Size: 1.75" x 2.45" (GB-GRAM Type II SSI)
- Weight: 32 grams
- Power: < 1.3 W (continuous tracking mode)

Performance Metrics

- 8 second direct-Y acquisition (Hot-Start)
- Position Error: < 3m (1 sigma SEP)
- Velocity Accuracy: < 0.1 m/s (1 sigma)
- PVT output: up to 10 Hz

NavAssure® 200 Technical Specifications Summary

- Interface: 80-pin connector (Type II SSI GB-GRAM)
- Host Interface: COM1 (3.3 V LVTTTL or RS-232)
COM 2 (3.3 V LVTTTL)
- Protocol: ICD-GPS-153
(Outputs: PVT, PR/DR, Channel/Satellite/SAASM Status)
- Key Fill Ports: DS-101 and DS-102
- PPS: 1 PPS In/1PPS Out
- Operating Voltage: 3.3 V +/- 10%
- Temperature
Operating: 0°C to +70°C
Storage: -55°C to +125°C
- Built-In Test (BIT): 95% coverage
- Antenna Input: Primary/Auxiliary, Active/Passive (MMCX Right Angle connectors)
- Codes/Frequencies: L1 and L2 Simultaneous, C/A and P(Y)

NavAssure® is a registered trademark of Mayflower Communications Company, Inc.

* The *NavAssure® 200* has been granted Security Approval by the GPS Directorate

** Suitable for SWAP constrained embedded radio, UAV and ground applications